

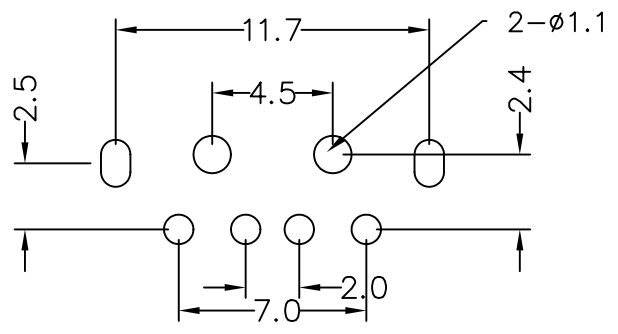
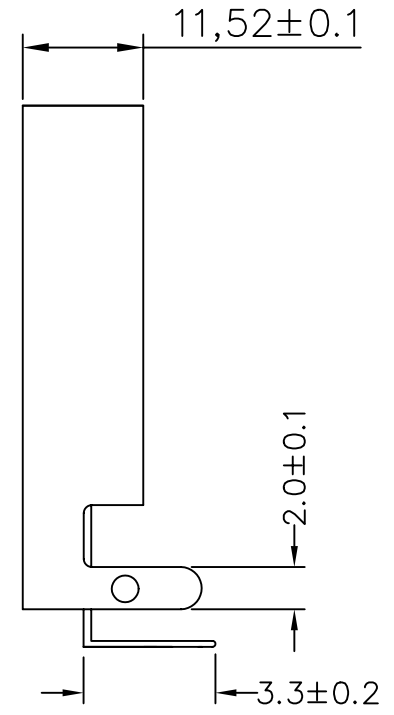


SPECIFICATIONS

Contact Current Rating: 1 Amperes
 Dielectric Withstanding Voltage: AC 500V R.M.S
 Insulation Resistance: 500 Megohms Minimum
 At DC 500V
 Contact Resistance: 30 Milliohms Maximum.
 Operating Temperature: -55°C ~ +105°C.
 Insulator: L.C.P. or P.B.T UL94-V0 Rated
 Contact: Brass.
 Gold Flash 3u", 5u", 10u", 15u", 30u"
 Shell: Cold Rolled Steel.
 Nickel, Tin or Gold Plated.

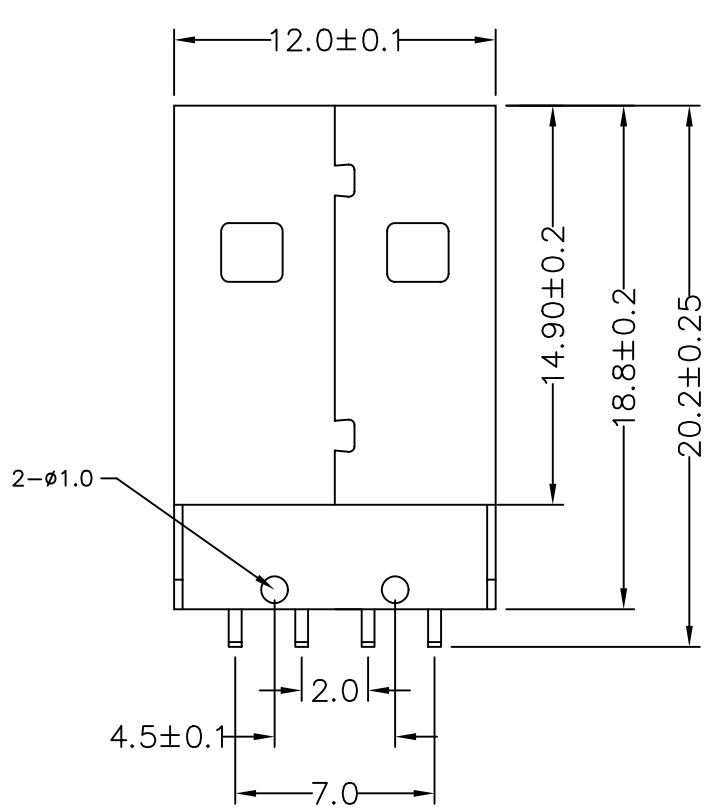

P.C.B LAYOUT

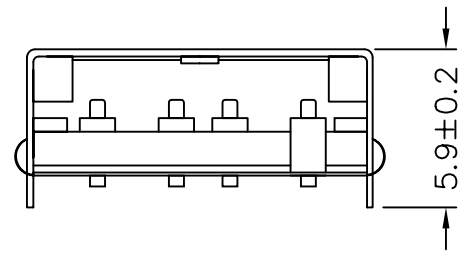

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 10016


APPROVED BY MEI
 CHECKED BY BECKY
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.13
 ANG.

SCALE NONE

REV. A0

UNIT mm



NO.	REV.	DESCRIPTION	CHK	DATE
A0		NEW RELEASE	MEI	
		REVISIONS	CHK	DATE