


DESTM32-S2-12 INSTRUCTION

DESTM32-S2-12 adapter connection board is suitable for present standard dot matrix e-papers with SPI Interface. (1.54/2.04/2.13/2.7/2.9/4.2/7.5" e-papers)

Following is the instruction of how to use the jumpers, to match with different sizes of e-papers:

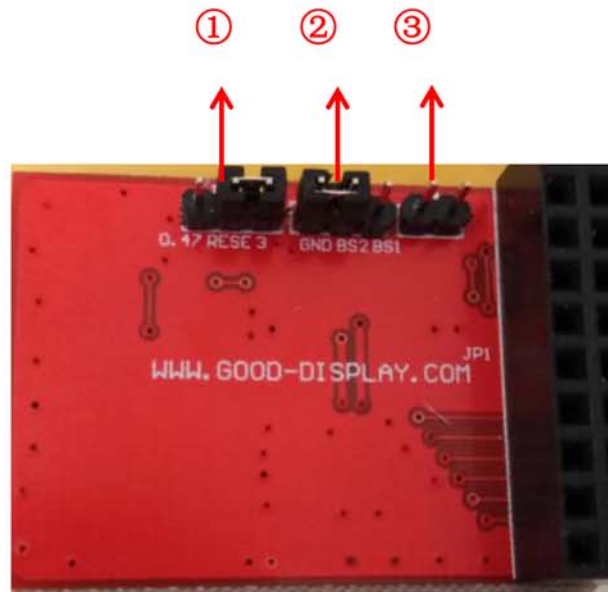

① Option 1: While shorting RESE and 0.47Ω, then the board is suitable for following e-papers:

- 1.54" BW e-paper: GDEW0154T8
- 2.13" BWR e-paper: GDEW0213Z16
- 2.7" BWR and BW e-papers: GDEW027W3 & GDEW027C44
- 2.9" BW e-papers: GDEW029T5 & GDEW029Z10
- 4.2" BWR and BW e-papers: GDEW042T2 & GDEW042Z15

Option 2: While shorting RESE and 3Ω, then the board is suitable for following e-papers:

- 1.54" BWR and BW e-papers: GDEP015OC1 & GDEW0154Z04
- 2.04" BW e-paper: GDE021A1
- 2.13" BW e-paper: GDE0213B1
- 2.9" BW e-paper: GDEH029A1/GDE029A1
- 7.5" BWR and BW e-papers: GDEW075T8 & GDEW075Z09

② Always short BS2 and GND. BS1 as reserved.

③ The function is prepared for future use, please keep open, not shorting.