


**General Specifications (通用技术参数)**

Step Angle (步矩角):  $1.8^{\circ} \pm 5\%$   
 Insulation Resistant (绝缘电阻): 500V DC 100M $\Omega$  Min  
 Insulation Strength (绝缘强度): 50Hz 1Minute 500V Min  
 Ambient Temperature (环境温度):  $-20^{\circ}\text{C} \sim +50^{\circ}\text{C}$   
 Temperature Rise (温升):  $80^{\circ}\text{C}$  Max  
 Radial Play (径向跳动): 0.02mm Max  
 End Play(轴向跳动): 0.1-0.3mm



SKU 编号	Model 型号	Phase Number 相数	Current 电流(A)	Resistance 电阻( $\Omega$ )	Inductance 电感(mH)	Max.Static torque 最大静转 矩(kg.cm)	Weight 重量 (kg)	Overall Dimension 外形尺寸		Connection Diagram 接线图
								L0(mm)	L1(mm)	
24501	57BYGH006	4	0.34	71	90	4.4	0.42	41	22	wdg.B
24502	57BYGH007	2	0.4	35.5	52	5.6	0.42	41	22	wdg.A
24503	57BYGH008	4	2	1.4	1.2	4.2	0.42	41	21	wdg.B
24504	57BYGH103	4	0.38	32	38	6	0.65	50	21	wdg.B
24505	57BYGH104	4	2.3	1.1	1.4	8.2	0.65	50	21	wdg.B
24506	57BYGH201	2	2.5	1.1	3.6	9.8	0.65	54	21	wdg.A
24507	57BYGH202	4	3	0.75	1.2	9	0.65	54	21	wdg.B
24508	57BYGH301	2	1.4	4.2	15	15	1.1	76	21	wdg.A
24509	57BYGH302	4	3	1	2.1	13	0.65	76	21	wdg.B
24510	57BYGH802	4	1.5	3.2	5.6	9	0.7	56	21	wdg.B
24511	57BYGH803	4	1.5	4.2	8.5	15	0.65	76	21	wdg.B

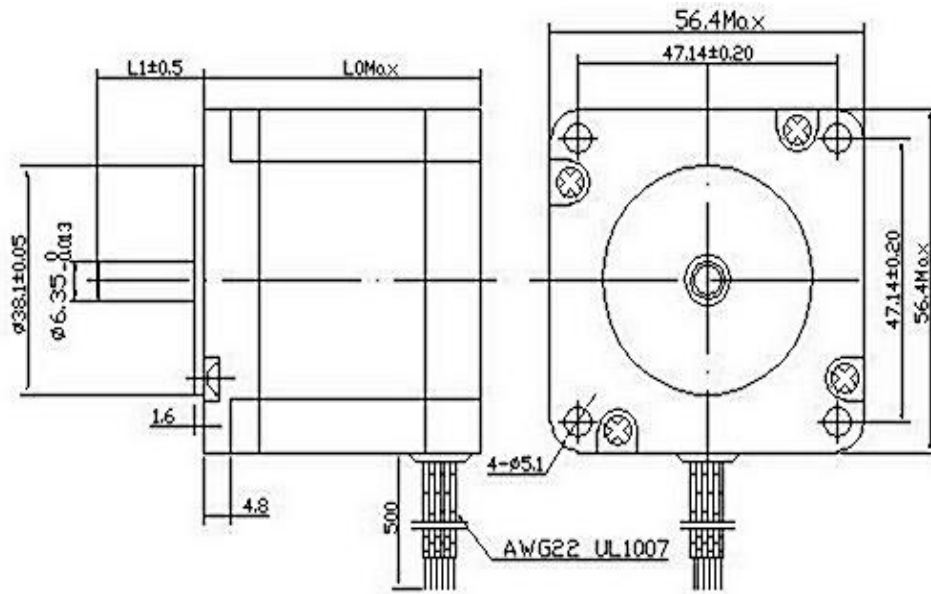

外形图 (FIGURE)

