



START

1

Resistor - Weerstand - Résistance -  
Widerstand - Resistencia - Motstand -  
Vastus - Resistenze



Lower side - Componentzijde  
- Inférieur soie - Niedriger seide  
- Inferior seda



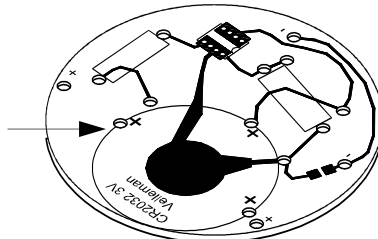


◇ R1 : 100

(Brown, Black, Brown) -(Bruin, zwart, Brown) -(Brun, noir, Brun) -(Braun, Schwarz, Braun) -(Brun, Svart, Brun) -(Ruskea, Musta, Ruskea) -(Marrón, Negro, Marrón) -(Castanho, Preto, Castanho) -(Marrone, Nero, Marrone)

◇ R2 : 100K

(Brown, Black, Yellow) -(Bruin, zwart, Geel) -(Brun, noir, Jaune) -(Braun, Schwarz, Gelb) -(Brun, Svart, Gul) -(Ruskea, Musta, Keltainen) -(Marrón, Negro, Amarillo) -(Castanho, Preto, Amarelo) -(Marrone, Nero, Giallo)





Top side - Bovenzijde -  
Haute soie - Top seide -  
Top seda


2

BATTERY HOLDER

solder drop - soldeer  
druppel - goutte de soudure  
- Lot Tropfen -  
gota de soldadura




C





3

IC



Watch the notch !  
Attention à l'encoche !





◇ IC1 : VMK167 (programmed PIC10F200-I/PG)

4


PCB TABS

◇ 4 x

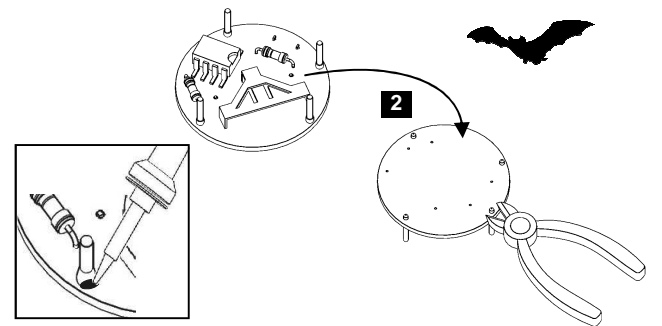

5


BUTTON



Top side - Bovenzijde -  
Haute - Top - Top

6


LED



◇ 5mm Yellow


7

LED COVER



8

BATTERY



9

OPERATION



realistically flickering flame - realistisch  
flakkerende vlam - flamme vacillante -  
teelicht (Flamme) flimmert realistisch -  
flama oscilante

fade in - fade out - ouverture/fermeture  
en fondu - encendido/apagado lento  
(fade in/out)

steady flame - stabiele vlam - flamme  
stable - teelicht (Flamme) brandt  
gleichmäßig - flama fija

deactivated - uitgeschakeld - désactivé  
- ausgeschaltet - desactivado

DIAGRAM

