
SPECIFICATION FOR **TFT LCD MODULE**

MODEL NO:

CUSTOMER:

Customer Approval:

- Approve Specification Only**
- Approve Specification and Sample**

APPROVED BY
DATE:

PREPARED BY	CHECKED BY	APPROVED BY

Contents

1	Introduction-----	3
2	General specification-----	3
3	Mechanical drawing-----	4
4	Absolute maximum ratings-----	5
5	Electrical characteristics-----	5
6	Optical characteristics -----	6
7	Pin Assignment -----	7

RECORDS OF REVISION

DATE	REF.PAGE PARAGRAPH DRAWING No.	REVISE D No.	SUMMARY	REMARK
2014-4-4	ALL	A	FIRST ISSUE	

1. Introduction

1.1 Scope of application

This specification applies to the Negative type TFT transmissive dot matrix LCD module that is supplied by **SHENZHEN HANYUMODERN ELECTRONICS CO.,LTD.** This LCD module should be designed for mobile phone use.LCD specification: 6:00, Dots 240xRGBx320.As to basic specification of the driver IC, refer to the IC (ILI9341V) specification and datasheet.

1.2 Structure:

Double display structure:

TFT Module + FPC + BL

FULL 262k Color 2.4 inch TFT LCD size for main LCD;

One bare chip with gold bump (COG) TECH;

1.3 TFT features:

Structure: TFT PANNEL+IC+FPC+TP;

Transmissive Type LCD

240 dot-source and 320 dot-gate outputs;

262k Color;

White LED back light;

1.4 Applications:


Mobile phone, Mp4

1.5 This module uses ROHS material

2. General specification

ITEM	Standard value	UNIT
LCD Type	TFT Negative Transmissive	---
Driver element	a-Si TFT Active matrix	
Number of Dots	240*(RGB)*320	Dots
Pixel Arrangement	RGB Vertical Stripe	
Pixel Pitch (W*H)	0.153(W)*0.153(H)um	um
Display Area	36.72(W) × 48.96(H) mm	mm
Viewing Direction	6 O'clock	
Driver IC	ILI9341V	
Module Size(W*H*T)	42.72(W) × 60.26 (H) × 2.30(T)	mm
Approx. Weight	TBD	g
Back Light	White LED	
Touch Panel Type	-	

3. Mechanical drawing

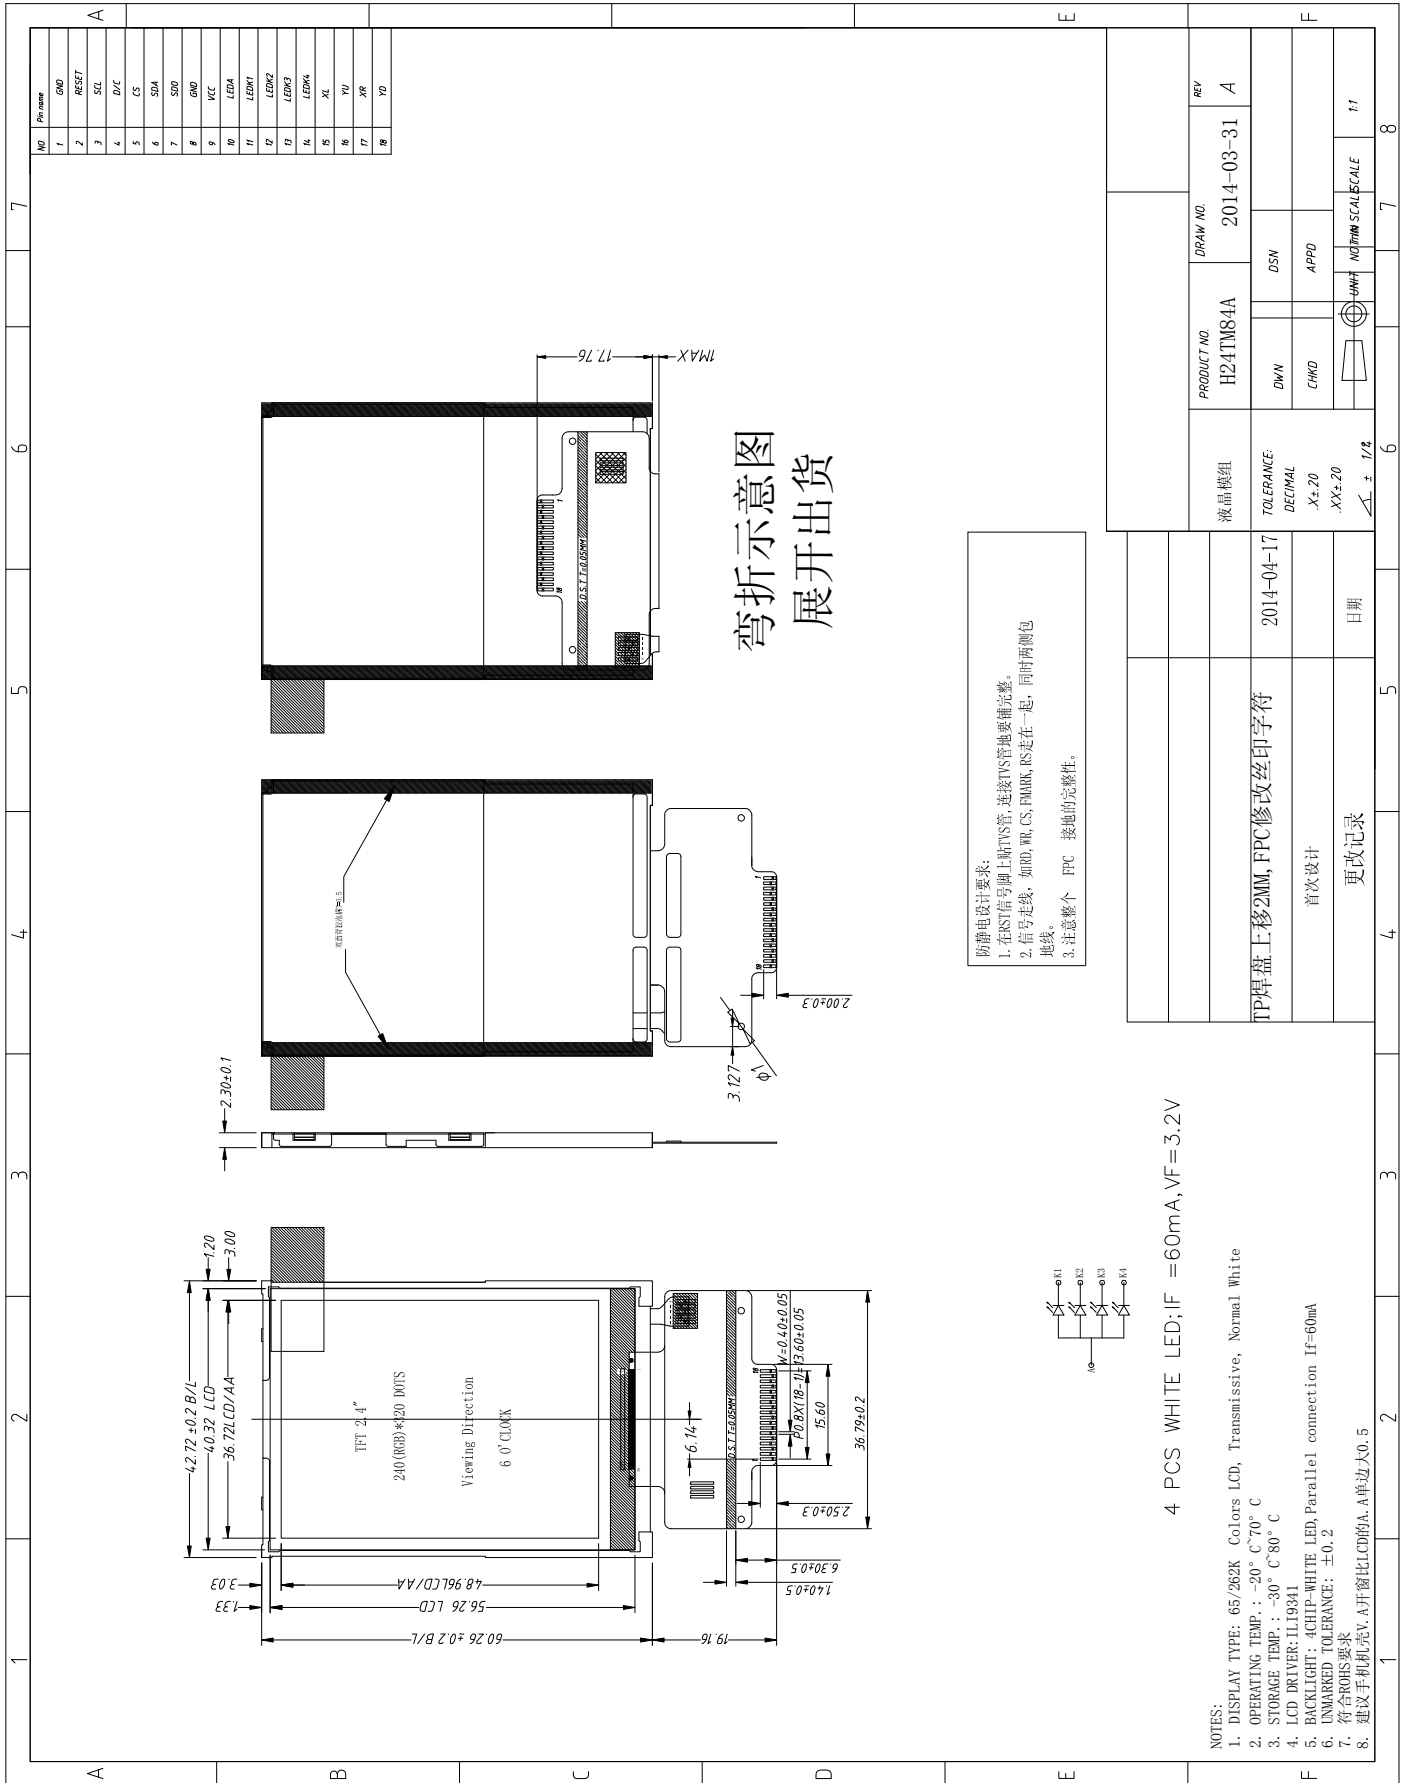

4. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Supply voltage for logic	V_{DD}	-0.3	3.0	V
Input voltage for logic	V_{IN}	-0.5	$V_{DD} + 0.3$	V
Supply current (One LED)	I_{LED}		20	mA
Operating temperature	T_{OP}	-20	+70	°C
Storage temperature	T_{ST}	-30	+80	°C

5. ELECTRICAL CHARACTERISTICS

Item	Symbol	Min	Typ	Max	Unit	Applicable terminal
Supply voltage for logic	V_{DD}	2.6	2.8	3.0	V	V_{DD}
Input voltage	V_{IL}	-0.3	-	$0.2 V_{DD}$	V	
	V_{IH}	$0.8 V_{DD}$	-	V_{DD}	V	
Input leakage current	I_{LKG}				μA	
LED Forward voltage	V_f	3.0	3.2	3.3	V	--
Input backlight current	I_{LED}	-	60	--	mA	With One LED

6. OPTICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITIONS	SPECIFICATIONS			UNIT	NOTE	
			MIN.	TYP.	MAX.			
Brightness	B	Viewing normal angle	--	150	--	Cd/m ²	All left side data are based on LEAD's product reference only	
Contrast Ratio	CR		100	120	--	--		
Response Time	$T_r + T_f$		--	25	40	ms		
CIE Color coordinate	Red		X_R	--	0.571			
			Y_R		0.352			
	Green		X_G	--	0.345			
			Y_G		0.557			
	Blue		X_B	--	0.148			
			Y_B		0.128			
White	X_W		--	0.314				
	Y_W		0.334					
Viewing Angle	Hor.	θ_{X+}	40	45	--	Deg.		
		θ_{X-}	40	45	--			
	Ver.	θ_{Y+}	30	35	--			
		θ_{Y-}	10	15	--			
Uniformity	Un		80	85		%		

7. MCU Interface Pin Function

NO.	SYMBOL	Description	I/O
1	GND	GND	Power supply
2	/RESET	Reset signal	I
3	SCL	serial interface clock	I
4	RS	Data/Commander selection	I
5	CS/	Chip select signal (Low: active)	I
6	SDA	Serial input signal	I
7	SDO	Serial output signal	O
8	GND	GND	Power supply
9	VDD	Analog supply power	Power supply
10	LEDA	LED anode	
11-14	K1- K4	LED cathode	
15	XL	Touch screen terminal	I
16	YU	Touch screen terminal	I
17	XR	Touch screen terminal	I
18	YD	Touch screen terminal	I